



# TC-15 Sensors ( ML-20 )

## Installation Options

Operating range to 15 metres

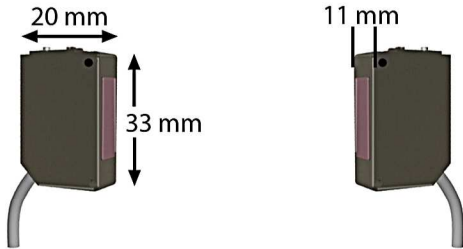

Sensors installed facing each other

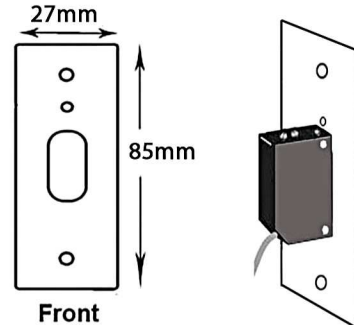

Flush mount (sensor inside hollow wall)  
Bracket standard in white or black



Normally sensors are installed  
directly opposite each other



Also, Flush mount brackets can be supplied  
to cater for angled positioning of the sensors

### Other Brackets Available



Sensor can be installed  
looking to the side.



Sensor can be installed  
looking to the front.